



ENDURAFRAME 1500





CONTENTS

PAGE

3	Features
4	Dimensions and weights
6	Supplementary plate
7	DropBlock Ballast
8	Wind resistance
9	Wind data scale specifications
10	Durability testing
11	Colour customisations
12	Compactness and lightness
13	Spares and maintenance
14	Associated Products
15	Recyclability
16	Contact information





FEATURES


30CM SQUARE MOUNTING FASTENERS
AS PER QUICKFIT MINI FRAMES TO
ACCEPT THE SAME SIGNFACES



ADDITIONAL
MOUNTING FASTENERS
FOR LOWER SIGNFACE
CONFIGURATIONS

SPACE FOR ENGRAVED
CUSTOMER LOGO

OPTIONAL 45CM SQUARE MOUNTING
FASTENERS TO ACCEPT A WIDER
RANGE OF SIGN FACES

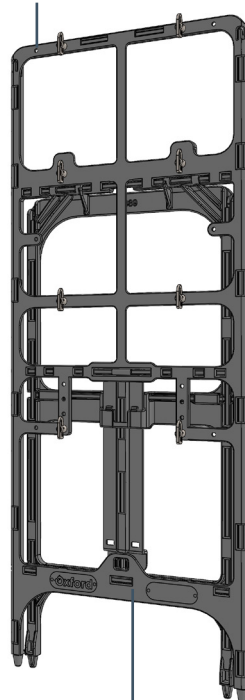

COLLAPSES FLAT

QUICKFIT

4 droplock system
compatible with all
quickfit faces.

Quickly change
faces on site.

Reduce weight and
quantity of products
in works vehicles.

Change damaged
reflective.

DURABLE

Flexible material
that won't crack.

Plastic frame will not
conduct electricity
or rust over lifetime.

Non-metal
construction
reduces theft.

Does not scratch
the inside of works
vehicles.

COMPACT & EASY TO USE

Quick to deploy.

Safe and easy to
handle with no
sharp edges.

EXTRAS

Can be customised
with customer
logos, MOQ 250.

Available in custom
coloured frame,
MOQ 250.

EnduraSign
Ballasts can be
fitted securely for
higher windspeed
categories.







DIMENSIONS AND WEIGHTS

ENDURAFRAME 1500 5.65Kg / 12.5lbs


DEPLOYED

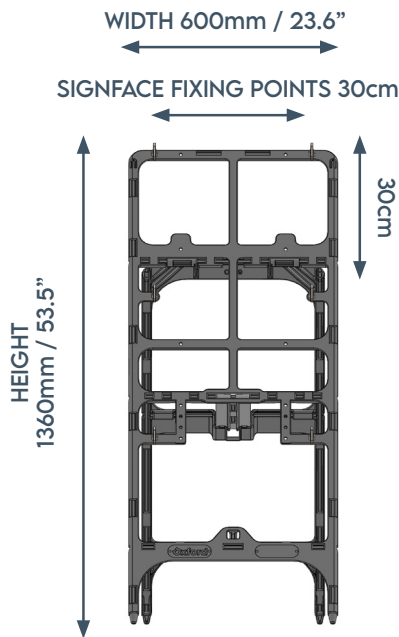

COLLAPSED

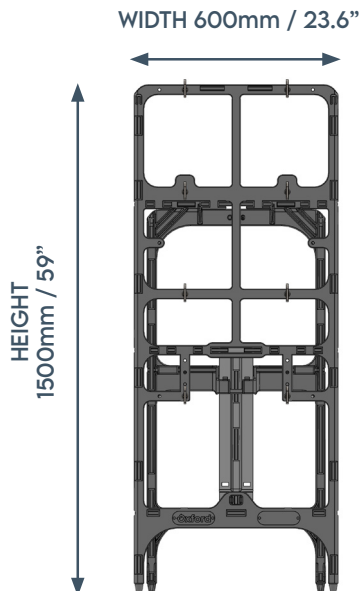

DEPTH 38mm / 1.5"

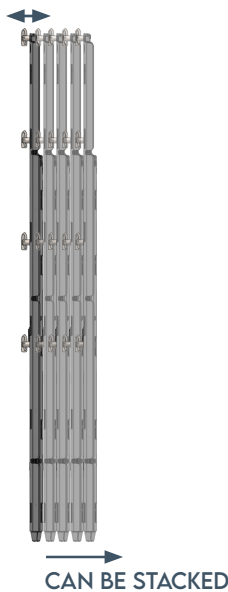


	Product Code	Assembled Weight
EnduraFrame 1500	O492	5.65kg





DIMENSIONS AND WEIGHTS

ENDURAFRAME 1500 ASSEMBLED WITH QUICKFIT SIGNFACE

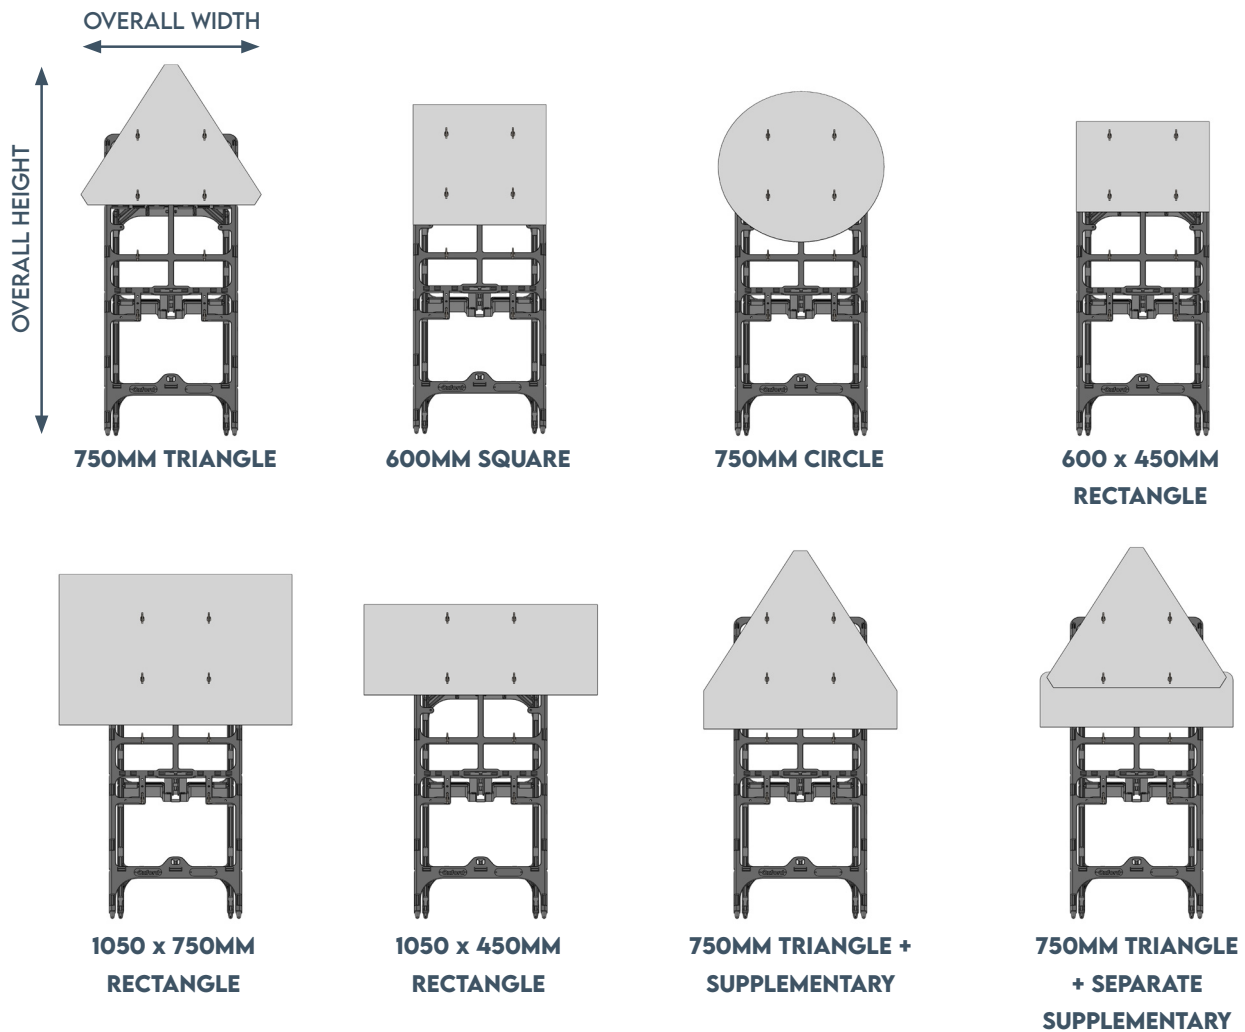

Assembled Signface	Overall Height Deployed	Overall Height Collapsed	Overall Width
750mm Triangle	1640mm	1840mm	810mm
600mm Square	1450mm	1630mm	600mm
750mm Circle	1515mm	1700mm	750mm
600 x 450mm Rectangle	1385mm	1555mm	600mm
1050 x 750mm Rectangle	1520mm	1705mm	1050mm
1050 x 450mm Rectangle	1385mm	1555mm	1050mm
750mm Triangle + Supplementary	1625mm	1825mm	870mm
750mm Triangle + Separate Supplementary	1640mm	1840mm	870mm






SUPPLEMENTARY PLATE


The EnduraFrame 1500 is compatible with supplementary plates. Fit with either a single piece sign face and sup plate, or a 2 piece sign face and sup plate.

SINGLE PIECE OPTION




**SINGLE PIECE 750MM TRIANGLE
+ SUPPLEMENTARY PLATE**

TWO PIECE OPTION

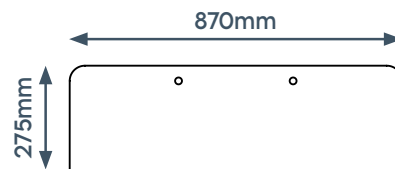


**SEPARATE SUPPLEMENTARY
PLATE**

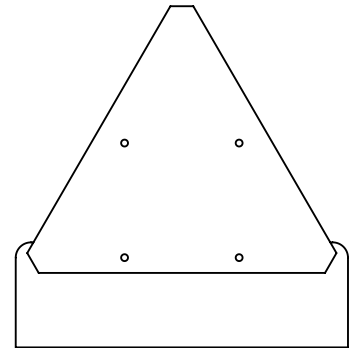


750MM TRIANGLE

TWO PIECE SIGN FACE AND SUP PLATE INSTALLATION INSTRUCTIONS

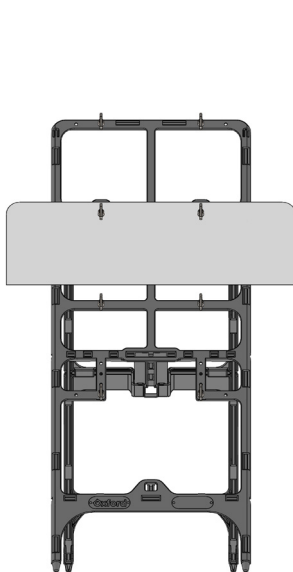

Fit supplementary plate to bottom drop locks on sign frame.

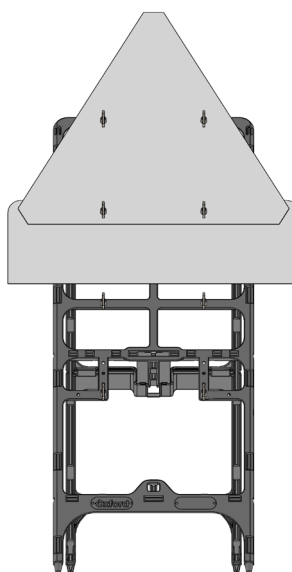

Fit sign face over the top of the supplementary plate.





DROP BLOCK BALLAST

DropBlock is not suited as a ballast in road-facing setting.


Achieve wind resistance up to Category B (39mph), and reduce defect notices from signs blowing over. See 'WIND RESISTANCE' page for full ballasting details.

The DropBlock Ballast can be used to ensure that temporary works stay clearly signposted and street works compliant.

This ballast weight replaces sandbags, it is stackable, quick to deploy and is significantly longer-lasting



Product No.	O474
Width	250mm
Length	98mm
Height	395mm
Weight	9kg
Quantity / Pallet	50
Colour	Black & Yellow

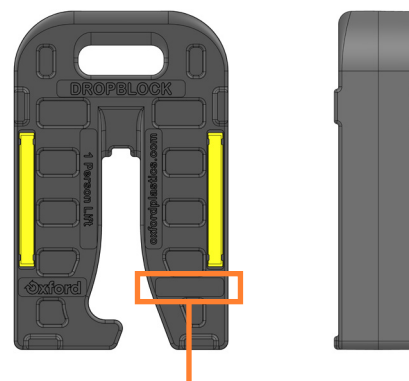

Custom logo area

DURABLE & SAFE

Create safe signage installations without using sandbags.

Avoid debris and trip hazards caused by the deterioration of sandbags.

Create highly visible signage installations.

COMPACT & EASY TO USE

Can be easily installed, transported and stored.

Locks onto the EnduraFrame to provide stability across a series of different signs in up to Category B winds.

EXTRAS

Adapt and customise ballast with corporate nameplate (120mm x 40mm), MOQ 180.



A closed loop recycling product made of recycled PVC.





WIND RESISTANCE


TRAFFIC SIGNS MANUAL (CHAPTER 8) COMPLIANCE

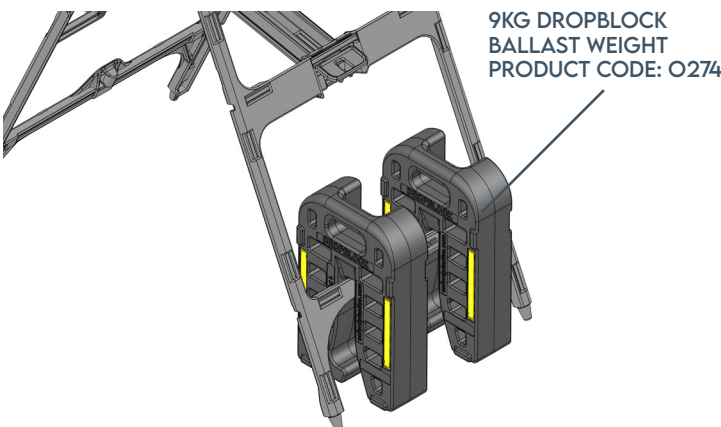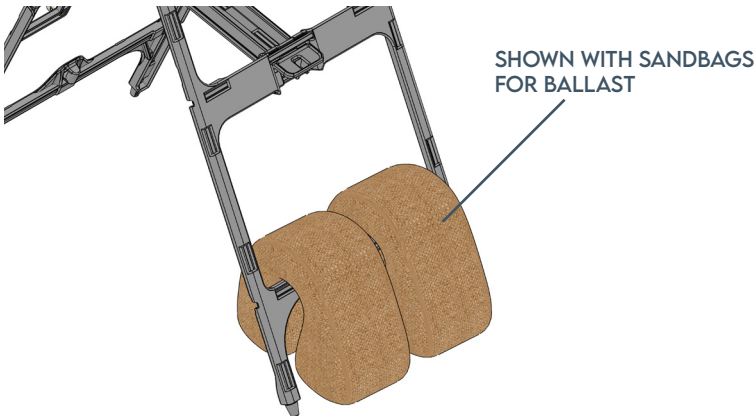

CODE COMPLIANCE

Wind classes are taken from BS 8442 (2006) Miscellaneous Road Traffic Signs and Devices – Requirements and Test Methods.

Wind tests conform to BS 8442 (2006) Annex B

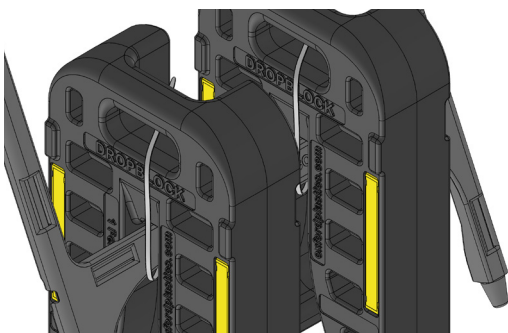

For added stability, cable tie the DropBlocks onto the EnduraFrame 1500 as shown.

Ballast required for Windspeed Categories per leg (Front and Rear)

Assembled Signface	C: 8.7m/s (19mph)		B: 17.6m/s (39mph)		A: 26.3m/s (58mph)	
	Sandbag	DropBlock	Sandbag	DropBlock	Sandbag	DropBlock
	Weight	Ballast	Weight	Ballast	Weight	Ballast
750mm Triangle	1kg	One	4kg	One	42kg	N/A
600mm Square	1kg	One	6kg	One	50kg	N/A
750mm Circle	1kg	One	8kg	One	58kg	N/A
1050 x 750mm Rectangle	3kg	One	13kg	Two	83kg	N/A
600 x 450mm Rectangle	1kg	One	4kg	One	44kg	N/A
1050 x 450mm Rectangle	1kg	One	9kg	One	64kg	N/A
750mm Triangle + Supplementary	1kg	One	8kg	One	62kg	N/A





WIND DATA SCALE SPECIFICATIONS

WIND CLASSIFICATIONS FOR BS8442

Wind Class	Meters per second (m/s)	Mile per hour (mph)
Class A	26.3	59
Class B	17.6	39.6
Class C	8.7	19.6

CLASSIFICATION AND LABELLING OF UNITS

The manufacturer shall indicate the mass ballast to be added to each barrier assembly to resist a specified class of wind speed, depending upon the barrier configuration and the level of wind resistance chosen.

BEAUFORT SCALE, WIND FORCE OR GALE FORCE

Force 2	8-12mph	Gentle breeze, leaves and small twigs in constant motion, wind extends light flag
Force 3	13-18mph	Moderate breeze, raises duct loose paper, small branches are moved
Force 5	19-24mph	Fresh breeze, small trees in leaf begin to sway, crested wavelets form on inland water
Force 6	25-31mph	Strong breeze, large branches in motion, whistling heard in telegraph wires, umbrellas difficult
Force 7	32-38mph	Near gale, walking noticeably hampered
Force 8	39-46mph	Gale, branches break, walking very difficult
Force 9	47-54mph	Severe gale, slates blown off roofs
Force 10	55-63mph	Storm, trees up rooted




DURABILITY TESTING



DRIVE OVER TEST

Manufactured with a flexible material that won't crack, the EnduraFrame 1500 can endure being driven over by a HGV and remain intact and useable.

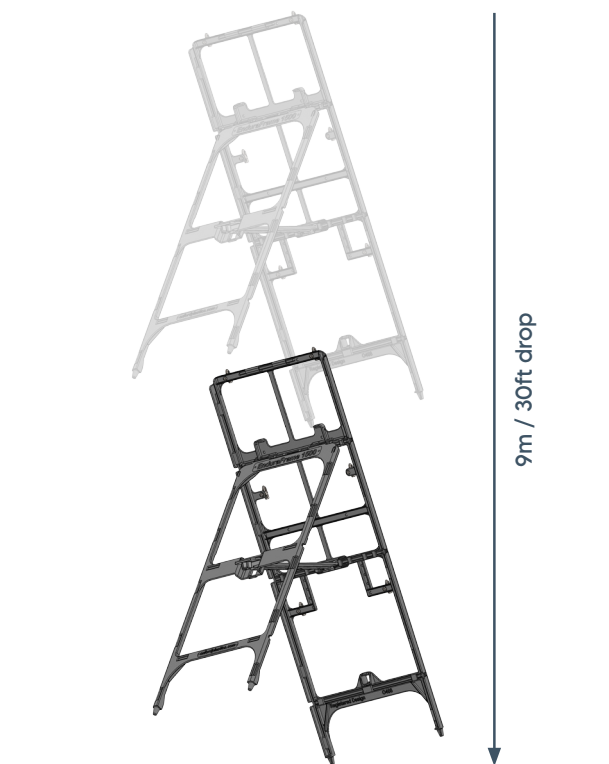


DROP TEST

The EnduraFrame 1500 is tested and proven to withstand a drop from 9m / 30ft high without sustaining any damage.

COLOUR AND CUSTOMISATION

THEFT PREVENTION AND INVENTORY MANAGEMENT WITH CORPORATE CUSTOMISATIONS

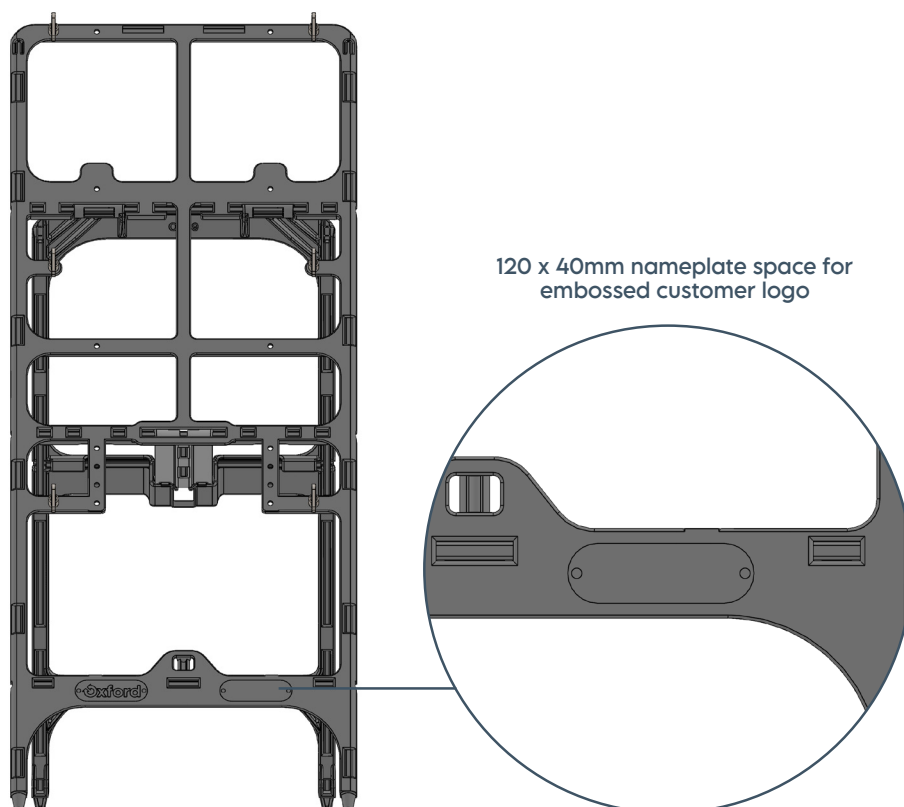


Coloured customisation, MOQ 250







COMPACTNESS AND LIGHTNESS

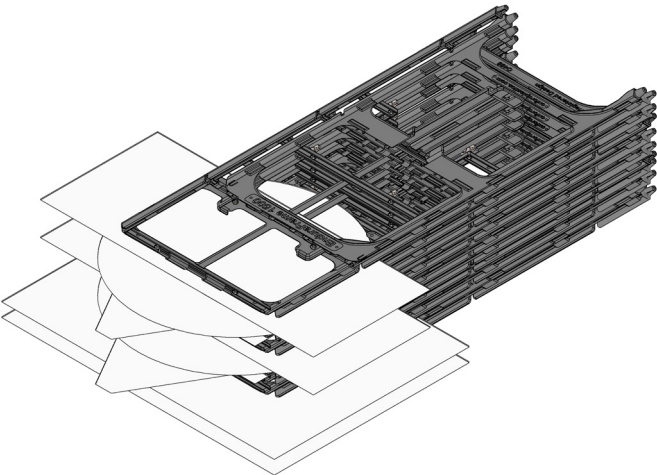

EnduraFrame 1500 can be stacked with signfaces still attached.

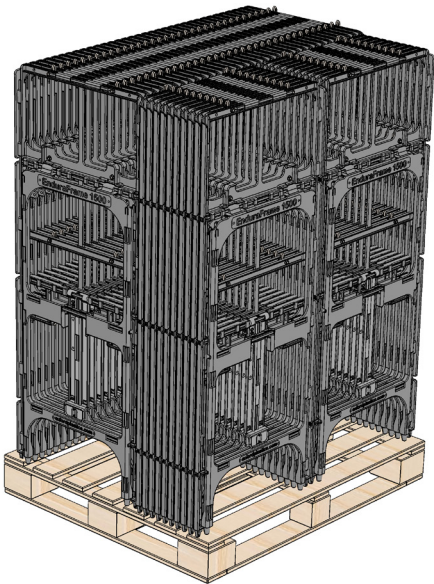

50x EnduraFrame 1500 on a pallet.

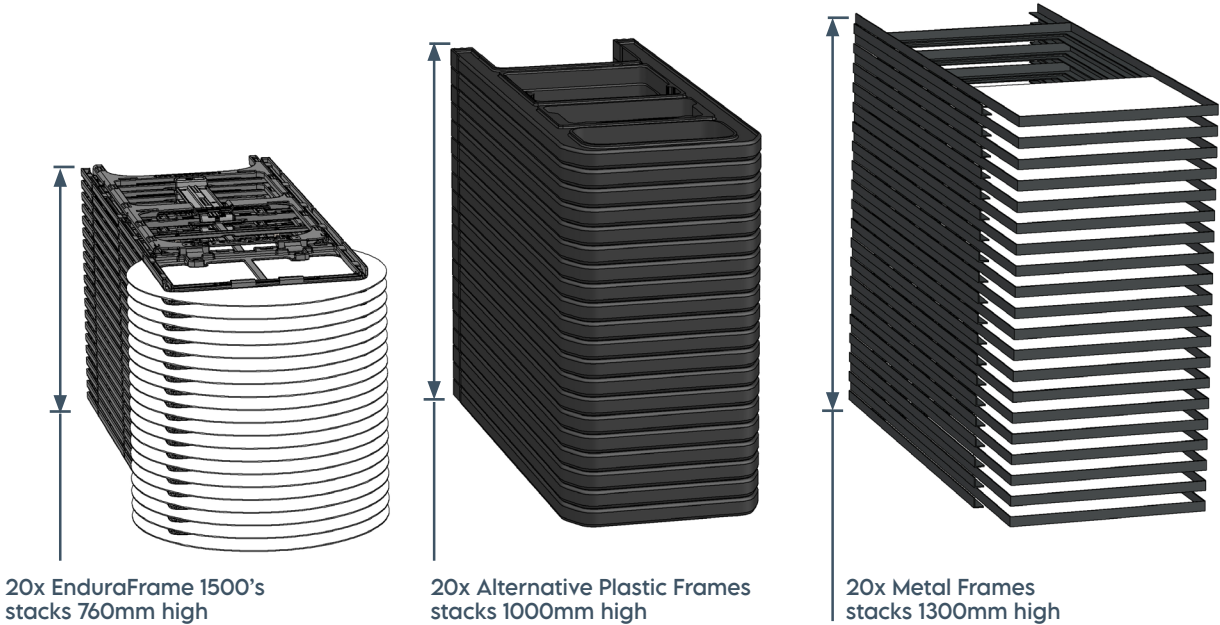


	EnduraFrame 1500	Alternative Plastic Frame	Metal Frame
Sign Weight	5.65kg	4kg	13kg
Stacked Sign Height	38mm	50mm	65mm



SPARES AND MAINTENANCE

Parts can be disassembled, enabling elements to be replaced in the unlikely event of damage.

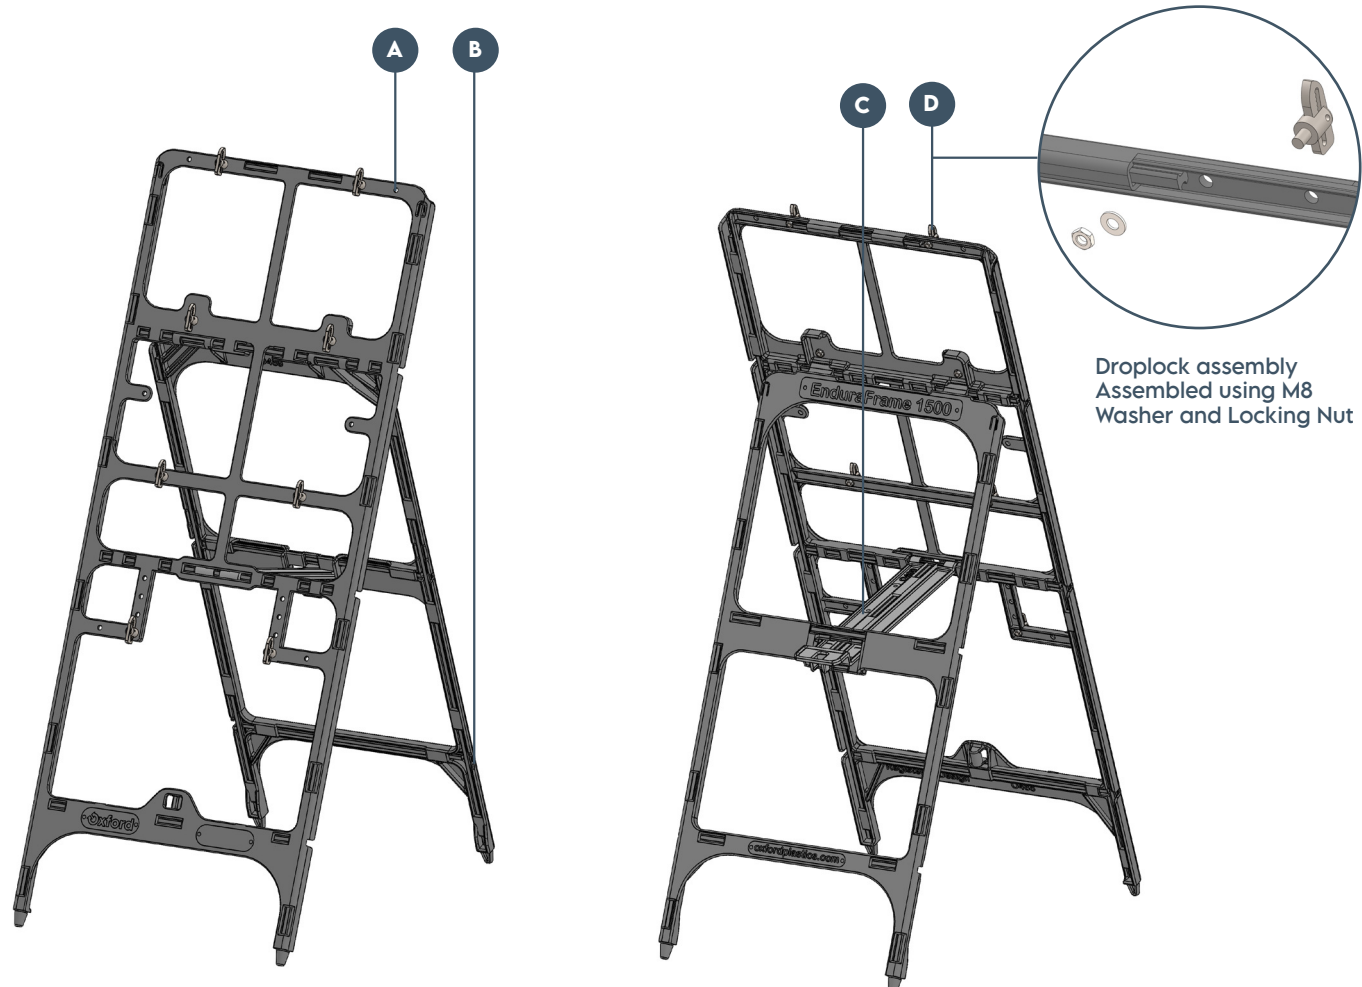

	Part Name	Material	Product code
A	Front	Black HDPE	O488
B	Rear	Black HDPE	O489
C	Stay	Black HDPE Custom colour HDPE	O490
D	Droplock	Galvanised steel	O474



ASSOCIATED PRODUCTS

When setting up a street works site, other Oxford Plastics solutions can be used to ensure compliance is achieved. Browse our Chapter 8 solutions; including advanced barrier systems, trench covers, road plates, wheelchair ramps and street works signs.



**ADVANCED
BARRIER SYSTEMS**



**PORTABLE
GATE BARRIERS**




**STREET WORKS
SIGNS**



**WHEELCHAIR
RAMPS**



**TRENCH
COVERS**

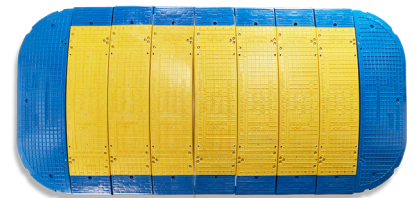

**ROAD
PLATES**



RECYCLABILITY


RECYCLABLE PRODUCTS

Made using recyclable plastic materials.

End of life products can be returned to Oxford Plastics for recycling.



The DropBlock Ballast Weight, made of recycled PVC, can be re-ground at Oxford Plastics and used to make new products.

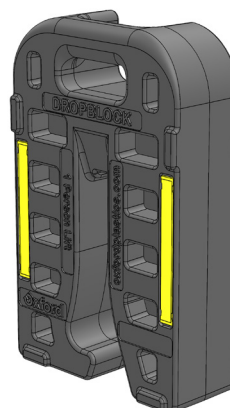



CONTACT INFORMATION

UK & R.O.W

Oxford Plastic Systems Ltd
Unit T2, Enstone Business Park
Enstone,
Chipping Norton
Oxfordshire
OX7 4NP
United Kingdom

sales@oxfordplastics.com
Tel: +44(0)1608 678888

USA

Oxford Plastic Systems LLC
1011 Centre Rd,
Suite 312,
Wilmington
DE
19805
USA

info@oxfordplasticsusa.com
1-800-567-9182

